

N5450Z-C2



Product Features

- Integrated Intel® I5-6360U 2.0GHz dual-core four-thread processor
- 2*DDR4 SODIMM memory slots, support 2133MHz memory, maximum support 32GB
- Support 1*HD OUTPUT1.4 and 1*DP dual 4K display, 1*VGA display output
- Support 2* WGI211AT Gigabit LAN, support Wake-on-LAN, PXE function
- Support 2* RS232 DB9 serial interface
- Support 6*USB interface, support 1* SIM card slot
- Support DC 12V power input
- Fan cooling, all aluminum alloy material

规格

model	N5450Z-C2 V1.0(6360U)	
Chassis	Material/Structure	All aluminum alloy, fan cooling
	color	Iron gray
	Size (length, width and height)	155*155*56.10MM
	Install	Desktop/Wall Mount
motherboard	CPU	Integrated Intel® Skylake-U I5 6360U/2.0GHz dual-core quad-thread processor TDP 15W
	system chip	Based on Intel® Skylake-U SOC platform
	show	Integrated Intel® Iris™ Graphics 540 supports DirectX 12 OpenGL 4.5
	Memory	2*DDR4 SODIMM memory slots, support 2133MHz memory, up to 32GB
front panel interface	POWER	1*Power switch, 1*Reset switch
	led	1* power indicator, 1* hard disk indicator
	AC LOSS	1*AC LOSS (power-on toggle switch)
	USB	2* USB2.0 interface
	SIM	1* SIM card slot, 3G/4G module application
rear panel interface	display interface	1*VGA interface(1920X1200@60Hz), 1*HD OUTPUT1.4 interface(4096X2306@24Hz),1* DP interface (4096X2304@60Hz)
	LAN	2*Intel® WGI211AT Gigabit LAN, support Wake-on-LAN, PXE function
	USB	4* USB3.0 interface
	COM	2* RS232 DB9 serial interface, COM2 supports RS232/RS485 switching
	audio	1* Line out interface, 1* MIC interface
	power supply	1* DC power adapter interface, support DC 12V power input
storage	SATA	1*2.5 inch hard drive expansion
	solid state drive	1* MSATA SSD expansion, transfer speed up to 6Gbps
expand	Mini PCIE	1* Mini PCIE slot, support WIFI/4G module
	M.2	1* M.2 slot, support M.2 2260/2280 NVME PCIE x4 standard SSD
software support	Microsoft Windows	Windows 10, 64bit (without key)
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (256 levels, 0~255 seconds)
Power requirements	Power Type	External power adapter
	Voltage input	DC 12V
	power output	AC TO DC, 60W
surroundings	Operating temperature	-10℃~60℃
	storage temperature	-20℃~70℃
	Relative humidity	5%-95% relative humidity, no condensation
	work vibration	0.5g rms/5-500HZ/random/operating




NANO准系统

所有产品规格变更, 均不另行通知 k

N5450Z-C2

尺寸图

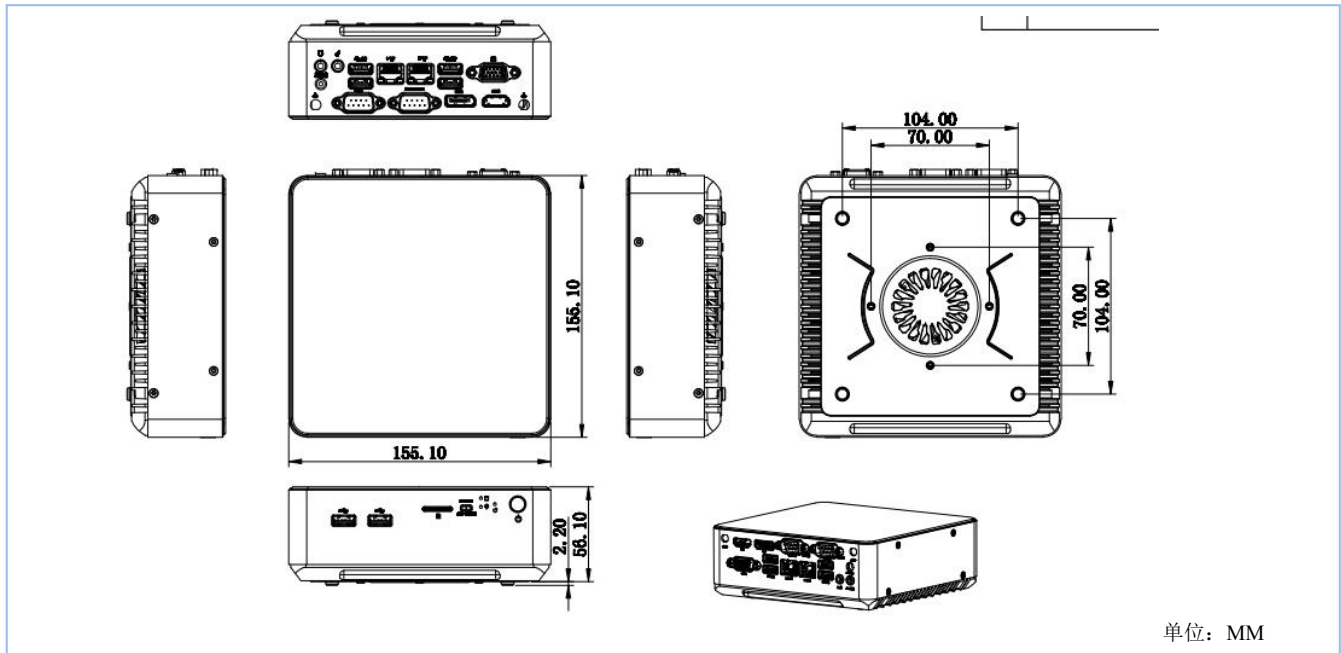

前面板外置I/O视图



后面板外置I/O视图



订货信息

No.	Model	Processor	Motherboard	Memory	M.2	LAN	COM	HD OUTPUT	VGA	DP	USB2.0	USB3.0	inside USB	SIM	power-input
1	N5450Z-C2 (6360U)	6360U/2.0GH	C57_I526D	2*SODDDR4	1	2	2	1	1	1	2	4	N/A	1	DC 12V
2	N5450Z-C2 (6650U)	6650U/2.2GH	C57_I726D	2*SODDDR4	1	2	2	1	1	1	2	4	N/A	1	DC 12V
3	N5450Z-C2 (7360U)	7360U/2.3GH	C57_I726D	2*SODDDR4	1	2	2	1	1	1	2	4	N/A	1	DC 12V
4	N5450Z-C2 (8145U)	8145U/2.1GH	C81-I326D	2*SODDDR4	1	2	2	1	1	1	2	4	N/A	1	DC 12V
5	N5450Z-C2 (8265U)	8265U/1.6GH	C81-I526D	2*SODDDR4	1	2	2	1	1	1	2	4	N/A	1	DC 12V