


STX-R52V VER:1.0 规格表




STX-R52V VER:1.0 正面图



STX-R52V VER:1.0 IO 图



STX-R52V VER:1.0 背面 IO

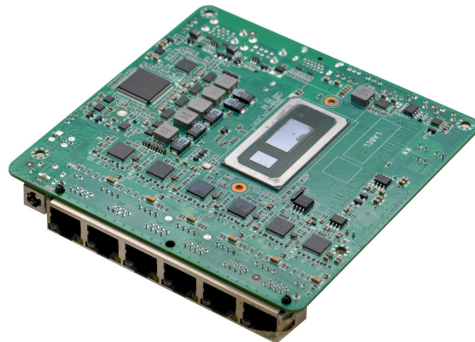

STX-R52V VER:1.0 背面图

Product model	STX-R52V VER:1.0
Processor	Integrated 10gen Intel®Celeron 5205U 1.90GHz dual-core dual-threaded processor,TDP 15W
Chipset	Compatible with Intel®Whiskey Lake-U/Comet Lake-U 8th/10th Celeron/Pentium/I3/I5/I7 low power processors
Internal memory	SOC
Display	1 * DDR4 SODIMM slot for dual-channel 2400MHz memory with a maximum capacity of 32GB
	Integrated Intel® UHD Graphics supports DirectX 12 OpenGL 4.5 and 4K
Network	1*HD OUTPUT1.4 port, the highest resolution supported is 4096X2304@24Hz
Deposit	6* Intel I225 2.5G Gigabit network adapter chip, supporting network wake up /PXE function
Store	1* MSATA slot, support Intel protocol SSD, transfer rate up to 6Gbps
Expansion	N/A
Rear I/O interface	1* 120pin high-speed terminal, including 2*COM,1*SATA,3*USB2.0,2*PCIE,1*DDI and other signals
	6* RJ45 Gigabit network interface
Front I/O interface	1*DC12V power input port
	2 * USB3.0 port,2 x USB2.0 port
	1* HD OUTPUT port
	1* Power on the power-on control switch
	1* Power indicator, 1* hard disk indicator
Built-in I/O interface	1* Power switch, 1* restart switch
Fan interface	1* DC power port 1*4pin, support 12V power input and output
GPIO	2*4pin CPU intelligent fan interface
BIOS	N/A
Guard dog	64Mb Flash ROM
Operating	Support hardware reset function (256 level, 0~255 seconds)

system	
Power supply type	Windows 10 / Linux
Operating temperature	DC 12V single power input
Storage temperature	-10°C to 60°C
Working humidity	-20°C to 70°C
dimension	120mm x 120mm

订购信息：

No	Mode	Processor	Frequency	Memory	VGA	HD		LAN	USB	COM	RS485	Power
						OUTPU	T					
1	STX-R52V VER:1.0	5205U	1.90G	1*SODDDR4	/	1	/	6*1225V	4	/	/	DC/12V