



H87SL VER1.3



H87SL VER:1.3 主板正面图

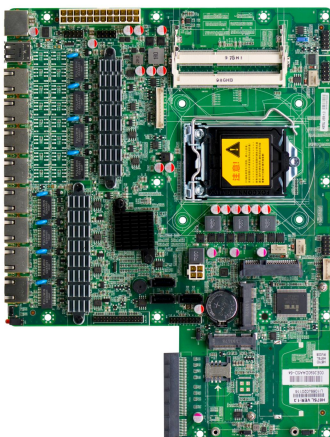

H87SL VER:1.3 主板 IO 图

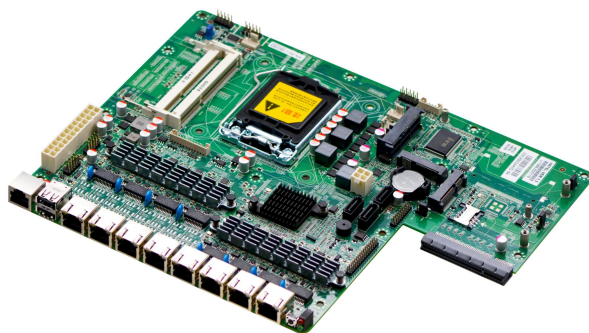

H87SL VER:1.3 主板侧面图

Product number	H87SL VER: 1.3
processor	Support 4th Intel® Celeron/Pentium Core™ i3/i5/i7 processor with LGA1150 architecture
chipset	Using Intel® H87 Express Chipset
RAM	2* SO DDR3 memory slot, support 1600/1333MHz memory, maximum support 16GB
Show	Integrated Intel® HD Graphics core graphics, 1*VGA display output
The internet	8*Intel 82583V gigabit network card supports Wake on LAN, PXE function
Store	1*SATA 2.5-inch notebook hard disk, which can be directly installed with the hard disk, the transmission speed can reach 6Gbps
	1* MSATA slot, SSD solid state drive supporting Intel protocol, transmission speed up to 6Gbps
	3*SATA3.0 hard disk interface
Expansion slot	1* 8X PCIE expansion slot, can expand Gigabit; 10 Gigabit fiber port
	1*Mini-PCIE slot, support 3G module
Backplane I/O interface	8* RJ-45 Gigabit network interface
	2* USB2.0 interface
	1* Serial port defined by CISCO standard
	1* Touch the power button
	1* Power/HDD indicator
Built-in I/O interface	1* JVGA1 port 1*12pin
	1* RS232 serial port 2*5Pin
	1* Network indicator port 2*16Pin
	1* PS/2 keyboard and mouse interface 1*6Pin
	4* USB2.0 interface 2*5Pin
	2* USB3.0 interface 2*10Pin

	1* Front panel switch button and indicator light interface 2*5Pin
	1* 24pin ATX power input
	1* 4pin ATX power input
	1* SIM card holder
Fan interface	2*4pin CPU fan interface, 1* 4pin system fan interface
GPIO	Support 4 input and output GPIO
BIOS	AMI 64Mb Flash ROM
Watchdog	Support hardware reset function (256 levels, 0~255 seconds)
Power type	ATX power input
Operating temperature	-10℃ ~60℃
Storage temperature	-20℃ ~70℃
Working humidity	5%-95% relative humidity, non-condensing
Size	280mm x 209mm

订购信息:

NO.	Model	Processor	Frequency	Southbridge	Memory	VGA	LAN	USB	COM	BYPASS	Power
1	H87SL_B VER:1.3	LGA1150	/	H87	2*SODDR3	1	8*82574L	8	2	2组	ATX
2	H87SL VER:1.3	LGA1150	/	H87	2*SODDR3	1	8*82583V	8	2	/	ATX