




ITX-B413_J1210L VER:1.0 规格

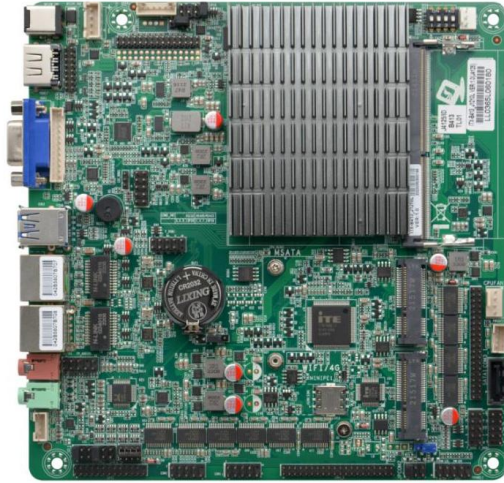

ITX-B413_J1210L VER:1.0 主板正面图



ITX-B413_J1210L VER:1.0 主板 IO 图

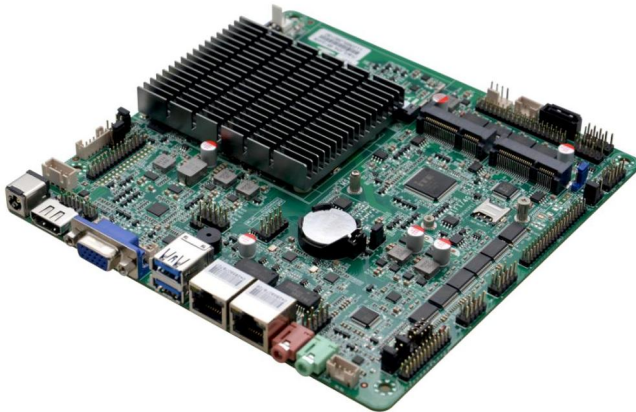

ITX-B413_J1210L VER:1.0 主板侧面图

Product model	ITX-B413_J1210L VER:1.0 (J4125)
processor	Integrated Intel®Celeron J4125 2.0GHz quad-core quad-thread processor,TDP 10W
	Compatible with the full range of Intel® Gemini Lake cpus, customers can choose flexibly
chipset	SOC
Internal memory	1* SODIMM slot for a single channel of 2400MHz DDR4 memory (up to 8GB)
display	Integrated Intel® UHD Graphics 600 core graphics card
	1* VGA,1*HD OUTPUT,1* LVDS interface, support dual channel 24BIT
network	2* Realtek RTL8111H Gigabit network adapter, supporting wake up /PXE
deposit	1* 7pin SATA3.0 hard disk interface, transmission rate up to 6Gbps
	The 1* MSATA slot supports SSDS with transfer speeds up to 6Gbps
Tone frequency	Onboard ALC897 7.1+2 channel hi-fi audio controller with MIC/Line-out support. Power amplifier
	The power amplifier is recommended to use a 2 Ω 5W speaker
expansion	Note: If MINIPE1 needs to support 4G modules, you need to adjust related hardware Settings, and F_USB2 will only support one USB
I/O ports on the backplane	1* HD OUTPUT display interface
	1 x VGA display port
	2* USB3.0 interface,
	2* RJ-45 Gigabit network interface
	1* Line out interface (green), 1* MIC interface (red)
	1 x 12V DC power input port
Built-in I/O interface	1* 4pin DC power interface (12V input/output power interface)
	1* LVDS interface 2*15pin, support dual channel 24BIT

	1* screen backlight power supply interface 1*6pin
	6* USB 2.0 interface 2*5Pin
	1* J_HD OUTPUT interface 2*8Pin(same signal as HD OUTPUT1 of the backplane IO interface)
	1* JVGA interface 1*12Pin(same signal as DB15)
	10* RS232 serial interface, COM1/2 support 9pin live function,COM2 support RS485/422
	1* LPT parallel interface 2*13Pin
	1* front audio interface 2*5pin
	1* Front panel switch button and indicator port 2*5Pin
	1* hard drive power port 1*4pin
	1* power amplifier interface 1*4pin
	1* SIM card seat
Fan interface	Fan free design, reserved 1*4pin CPU fan port,1* 3pin system fan port
GPIO	Supports four input/output GPIO
BIOS	64Mb Flash ROM
Guard dog	Support hardware reset function (256 level, 0~255 seconds)
Operating system	Windows 10/Linux
Power supply type	Adopts DC 12V power supply
Operating temperature	-10℃ to 60℃
Storage temperature	-20℃ to 70℃
Working humidity	5%-95% relative humidity, no condensation
dimension	170mm x 170mm

订购信息:

保存期限: 三年

表单编码: QR-PD-004 (A0)

NO.	Model	Processor	Frequency	Memory	VGA	HD OUTP UT	LVDS	EDP	LAN	USB	COM	485	Power
1	ITX-B413_J1210L VER: 1.0 (J4125)	J4125	2.0G	1*SODDR4	1	1	2ch*24bit	/	1*8111H	8	10	COM2	DC12V